

Viega PureFlow Poly PEX Press Fittings with Attached Stainless Steel Press Sleeves for ViegaPEX, ViegaPEX Ultra, ViegaPEX Barrier and FostaPEX SDR-9 Cross-linked Polyethylene (PEX)

Scope

This product specification designates the requirements for Viega PureFlow Poly PEX Press fittings with the Smart Connect feature and attached stainless steel press sleeves with tool locator ring to be used as connections for ViegaPEX, ViegaPEX Ultra, ViegaPEX Barrier, and FostaPEX tubing in 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2" and 2" sizes as available. The connections are to be completed with the aid of a Viega PureFlow PEX Press Hand Tool or Viega PureFlow PEX Press Power Tool.

Materials

Viega PureFlow Poly PEX Press fittings are molded from Radel® R polymer. All Viega PureFlow PEX Press fittings are precision-made to tight tolerances for a consistent fit with ViegaPEX tubing, exhibit excellent resistance to the corrosive effects of water and are well suited for hot water applications. All Viega PureFlow Poly PEX Press fittings meet California AB 1953 no lead requirements. "Zero Lead" identifies Viega products meeting the lead free requirements of California and Vermont law, effective January 1, 2010, as tested and listed against NSF-61, Annex G.

The stainless steel press sleeves incorporate three (3) view holes and are manufactured from 304 stainless steel that will not corrode, maintaining a clean appearance for the lifetime of the system. The tool locator rings are color-coded to match their appropriately sized PEX Press hand tools and are what hold the PEX press sleeve to the fitting, allowing it to be removed and/or replaced in the unlikely event the sleeve is damaged during handling or shipping (replacement sleeves and locator rings available separately).

Marking and Certification

Viega PureFlow Poly PEX Press fittings with attached stainless steel sleeves are manufactured and certified to the requirements of ASTM F877. Viega PureFlow Poly PEX Press fittings and sleeves are marked with the size, manufacturer's mark and required marking(s) of third-party certification organizations. Fittings also meet the requirements of ANSI/NSF-61 for health effects and are suitable for contact with potable water. NSF International and other certification organizations conduct random on-site inspections of manufacturing facilities and independently test PureFlow Poly PEX Press fittings for compliance with physical, performance and toxicological standards.

Recommended Uses

Viega PureFlow Poly PEX Press fittings with attached stainless steel press sleeves are intended and recommended for use in potable water distribution systems with ViegaPEX, ViegaPEX Ultra and FostaPEX tubing, and for hydronic heating, snow melt and cooling systems with ViegaPEX Barrier and FostaPEX tubing meeting the requirements of ASTM F876. Viega PureFlow Poly PEX Press fitting system components are available only from Viega and are not interchangeable with components and tubing from other suppliers. For information on other hot and cold applications not listed here, consult with your Viega representative.

Handling and Installation

Viega PureFlow Poly PEX Press fittings are corrosion and impact resistant. However, they are still softer than metals and must be protected from UV exposure and volatile organic compounds (VOC's) which can damage them. Use of these materials in hot and cold water distribution system must be in accordance with good plumbing practices, applicable code requirements, and current installation practices available from Viega. Contact a Viega representative or the applicable code enforcement bureau for information about approvals for specific applications.

Viega... The global leader in plumbing, heating and pipe joining systems

301 N. Main, 9th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618 • www.viega.com

©2011, ProPress®, FostaPEX®, Seapress®, MegaPress®, MegaPressG® and Viega® are registered trademarks of Viega GmbH & Co. PureFlow®, Smart Connect®, Climate Panel®, Climate Mat®, Climate Trak®, MANABLOC®, Radiant Wizard®, S-no-ice®, Snap Panel®, XL® and XL-C® are registered trademarks of Viega LLC. MiniBloc™, ProRadiant™, PolyAlloy™, Poly PEX Press™ SmartLoop™ and Zero Lead™ are trademarks of Viega LLC; GeoFusion™, ProPressG™ and ViegaPEX™ are trademarks of Viega GmbH & Co. KG.

Quality Assurance

When the product is marked with the ASTM F877 designation, it affirms that the product was manufactured, inspected, sampled and tested in accordance with these specifications and has been found to meet the specified requirements.

Certifications

cNSF@us pw

- NSF International Performance and Health Effects (Standards 14 & 61)
- NSF certified to CSA B137.5 (Canadian Standards Association)

NSF Certified to NSF-U.P. Code

- approved for Uniform Plumbing Code, listed to ASTM F876 / F877



- ICC ES-PMG™ 1038 / 1015 plumbing and heating systems

Friction Loss

Viega PureFlow Poly PEX Press Fittings (Equivalent Length of PEX Tubing in Feet)

SIZE	COUPLING	90° ELBOW	TEE RUN	TEE BRANCH
3/8"	4.5	14.3	6.5	14.7
1/2"	2.6	12.6	3.9	14.0
3/4"	2.1	12.5	3.1	14.0
1"	2.5	14.5	3.5	16.0
1-1/4"	3.1	17.5	4.0	18.4
1-1/2"	3.7	22.4	5.3	25.1

This information is based on tubing nominal flow rate.
(@ 8 fps flow velocity)


Smart Connect Feature

Viega PureFlow Poly PEX Press includes the Smart Connect feature providing quick easy identification of unpressed connections during the pressure testing process. Unpressed connections are located by pressurizing the system to 0.5 PSI to 100 PSI. The Smart Connect feature is an integral part of the fitting design assuring leakage of an unpressed connection. Once the fitting is pressed it will create a leak-proof, permanent connection.

Viega PureFlow Poly PEX Press Fittings Typical Fitting Insert Dimensions


SIZE	A	B	Tolerances	L
3/8"	0.207	0.343	+/- .004	0.595
1/2"	0.315	0.472	+/- .004	0.595
3/4"	0.486	0.661	+/- .004	0.595
1"	0.667	0.855	+/- .004	0.752
1-1/4"	0.819	1.037	+/- .004	1.091
1-1/2"	0.952	1.226	+/- .004	1.091

NOTE: Dimensions are in English units. Tolerances shown are Viega requirements. Viega Poly PEX Press fittings are manufactured within these specifications.



Attached Stainless Sleeve, Pressed

A pressed fitting has jaw witness marks (P) indicating the connection has been properly made.

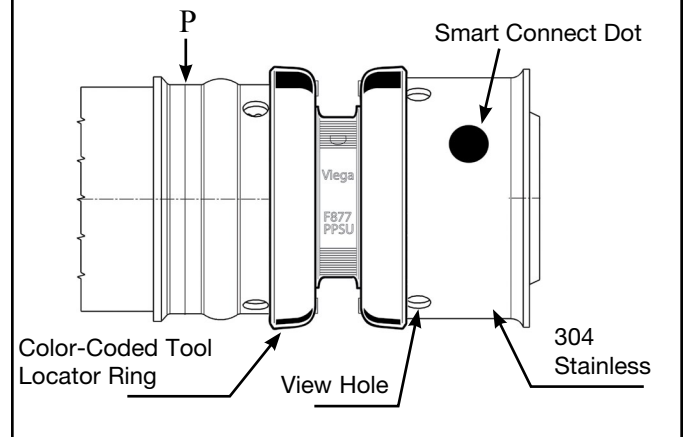

Viega... The global leader in plumbing, heating and pipe joining systems

301 N. Main, 9th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618 • www.viega.com

©2011, ProPress®, FostaPEX®, Seapress®, MegaPress®, MegaPressG® and Viega® are registered trademarks of Viega GmbH & Co. PureFlow®, Smart Connect®, Climate Panel®, Climate Mat®, Climate Trak®, MANABLOC®, Radiant Wizard®, S-no-ice®, Snap Panel®, XL® and XL-C® are registered trademarks of Viega LLC. MiniBloc™, ProRadiant™, PolyAlloy™, Poly PEX Press™ SmartLoop™ and Zero Lead™ are trademarks of Viega LLC; GeoFusion™, ProPressG™ and ViegaPEX™ are trademarks of Viega GmbH & Co. KG.