
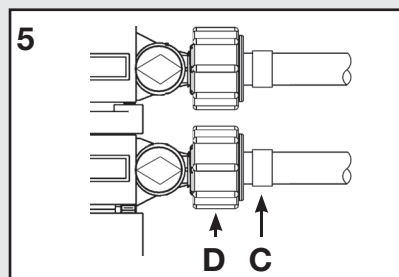
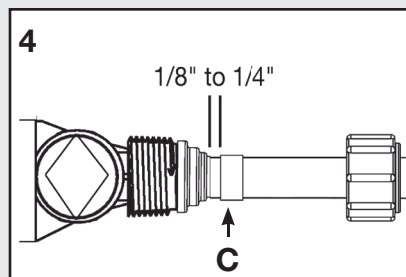
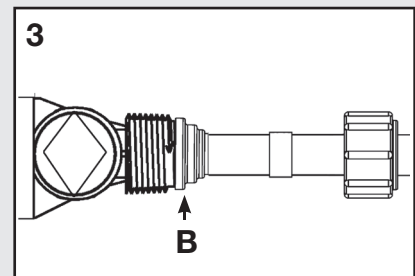
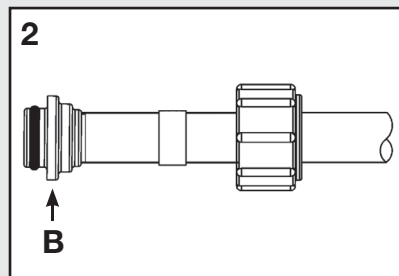


Product Instructions

MANABLOC[®] Zero Lead PEX Crimp Port Adapters

THE WATER SUPPLY TO THE MANABLOC AND THE PORT VALVES SHALL BE TURNED OFF BEFORE ATTEMPTING INSTALLATION OF CRIMP ADAPTERS.

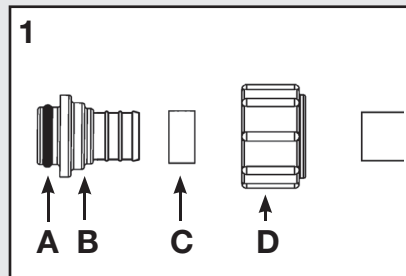

1. Slide the supplied swivel nut (D) and a crimp ring (C) onto the tubing.
2. Insert the barbed end of the fitting (B) fully into the end of the tubing as shown.
3. Ensuring sealing element (A) is in place and clean of any dirt or debris, wet sealing element with tap water and insert fitting (B) into desired port until the fitting flange sets flush with the end of the port.
4. Slide the crimp ring (C) to within 1/8" to 1/4" from the end of tube. Crimp the ring with an appropriately sized full-circle crimp tool. DO NOT CRIMP TWICE. Refer to current PureFlow Water Systems Installation Manual for additional crimping information.
5. Slide the swivel nut (D) over the crimped ring (C) and thread the nut onto the MANABLOC port. HAND TIGHTEN ONLY. Open the port valve(s) before turning on the main water supply.

NOTE: "Zero Lead" identifies Viega products meeting the lead free requirements of California and Vermont law, effective January 1, 2010, as tested and listed against NSF- 61, Annex G

Viega...The global leader in plumbing and heating systems.

301 N. Main, 9th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 800-976-9817 • E-Mail: service@viega.com • www.viega.com