

Product Instructions

viega

Compact Decoiler

Applications

The Compact Decoiler is to be used to distribute PEX tubing with little effort by the installer. This product is to be used only with smaller ViegaPEX Barrier coils (see table 1.1).

Dimensions





Height = 28 inches
Width = 56 inches
Weight = 34 lbs.

Size	Length
5/16"	250 ft.
5/16"	1000 ft.
3/8"	300 ft.
1/2"	300 ft.
1/2"	400 ft.
1/2"	1200 ft.
5/8"	500 ft.
3/4"	150 ft.

Table 1.1

Decoiler includes:

- 4 coil I.D. support arms
- 2 retaining arms (4 wingnuts attached)
- Tubing guide arm
- Coil carousel with 4 retracting arms
- Base stand with 4 retracting legs

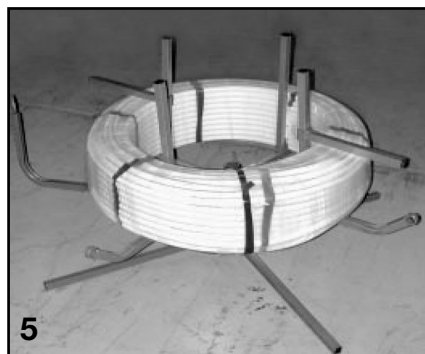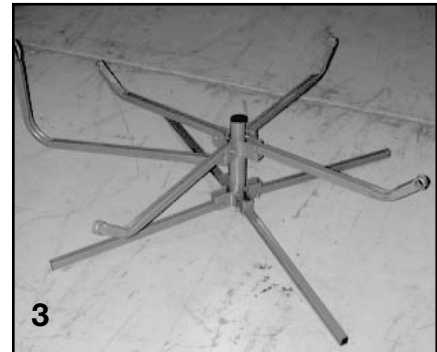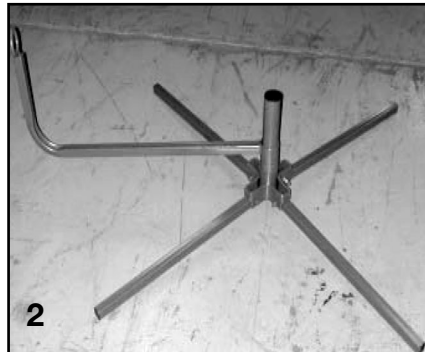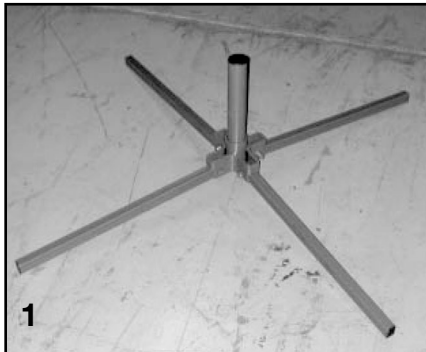

Instructions

1. Open all four retracting legs of the base stand on a flat surface with the base shaft pointing upward.
2. Place the tubing guide arm onto the base shaft with the guide arm pointing upward.
3. Slide the coil carousel (with the 4 retracting arms pointed up and together) onto the base shaft with the arms pointing upward. Once the carousel is seated completely on the base shaft, lower the arms down into the open position. **CAUTION: Arms can fall down during this step and may cause injury.**
4. Insert the bolts of the coil I.D. support arms into each of the four holes supplied in the coil carousel arms. Use the four wingnuts that are zip tied to the retaining arms to attach them securely.
5. Place tubing coil around support arms. Slide the square end of the coil retaining arms onto the coil I.D. supports pointing outward. These arms rest on top of the coil during the installation of the tubing.

Viega... The global leader in plumbing, heating and pipe joining systems

301 N. Main, 9th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618 • www.viega.com

©2011, ProPress®, FostaPEX®, Seapress®, MegaPress®, MegaPressG® and Viega® are registered trademarks of Viega GmbH & Co. PureFlow®, Smart Connect®, Climate Panel®, Climate Mat®, Climate Trak®, MANABLOC®, Radiant Wizard®, S-no-Ice®, Snap Panel®, XL® and XL-C® are registered trademarks of Viega LLC. MiniBloc™, ProRadiant™, PolyAlloy™, SmartLoop™ and Zero Lead™ are trademarks of Viega LLC. GeoFusion™, ProPressG™ and ViegaPEX™ are trademarks of Viega GmbH & Co. KG.

PI-PR-561131 0112 (Compact Decoiler)